


Note: The manufacturer's specifications must be followed for the installation of a brick paver stone sidewalk.

DETAIL FOR BRICK OR BRICK PAVER STONE SIDEWALK

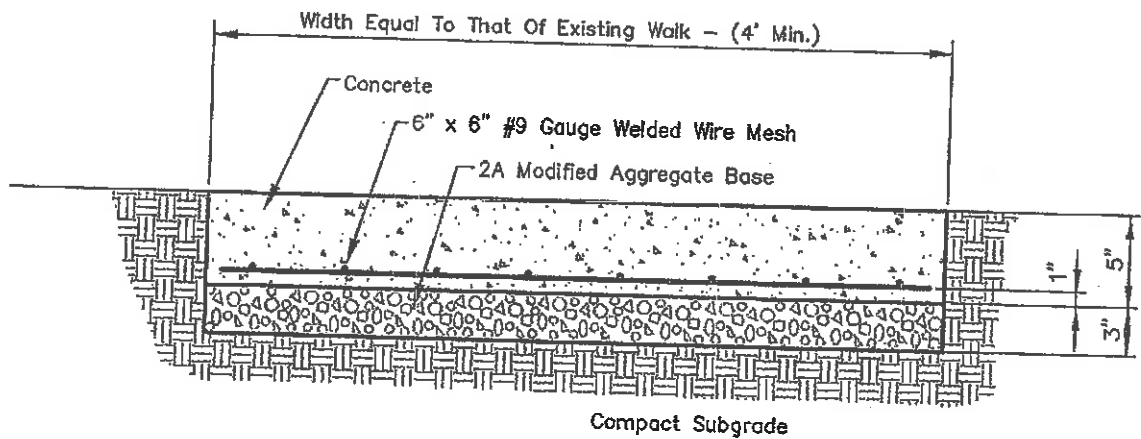

CONCRETE SIDEWALK DETAIL

NOTES:

1. Sidewalks on lots where none exists shall be located at the back of the curb. The width of such sidewalk shall be a minimum of four (4) feet.
2. Where driveways cross sidewalks their depth shall be increased to 6" with the above reinforcement.
3. When removing or replacing existing sidewalk, the limits of the replacement must extend to the nearest joints or the full slab must be replaced.

ADOPTED BY COUNCIL 07/10/2000

REVISIONS:
March 20, 1992
April, 1997
May, 1997

BOROUGH OF DORMONT "PUBLIC IMPROVEMENT REQUIREMENTS"

THE GATEWAY ENGINEERS, INC.
PITTSBURGH, PA